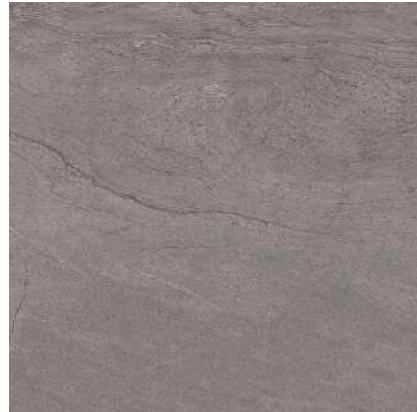


Model: AUSTIN DARK GRAY 40X80(A)

Codes: 100202038 - V57100031

Water absorption: Bla - Porcelánico ( $E \leq 0.1\%$ )**DIMENSIONAL FEATURES**  
UNE-EN ISO 10545-2

Length	800 MM	
Length and width deviation	Below 0.15%	+/-0.3%*
Side straightness deviation	Below 0.15%	+/-0.3%*
Squareness deviation	Below 0.15%	+/-0.3%*
Surface flatness deviation	Below 0.15%	+/-0.4%*
Thickness	10.5 MM	+/-5%*
Width	400 MM	

\*ISO-13006:2018 UNE-EN 14411:2016

**MECHANICAL FEATURES**  
UNE-EN ISO 10545-4-6-7-11

Abrasion resistance	PEI 3 / 600v	
Breaking strength	3054 N	>1300N*
Crazing resistance	Resists 3 cycles	
Modulus of rupture	53 N/MM2	>=35N/mm2*

\*ISO-13006:2018 UNE-EN 14411:2016

**HYGIENIC FEATURES**  
UNE-EN ISO 10545-13-14:1995

Chemical resistance	Class "A" for swimming pools and cleaning products (resists attack). Minimum Class "B" for acids and bases	B Min.*
Stain resistance	Class 5. Easy cleaning with water	3 Min.*

\*ISO-13006:2018 UNE-EN 14411:2016

**SCOPE OF USE**

Technical code-1	Use on medium traffic floors	
------------------	------------------------------	--

**ANTI-SLIP VALUE**  
UNE 41901:2017 EX, UNE 41902:2017 EX, DIN-51130 y ASTM C1028

4s	17	
Dynamic coefficient of friction	0.34	
Slip resistance (pendulum-wet)	CL1	
Slip resistance (ramp)	R-10	

\*ISO-13006:2018 UNE-EN 14411:2016

System Certification



PACKING		
Boxes	1.28 M2/BOX	
Pallets	61.44 M2/PAL	
Units	0.32 M2/PIECE	

System Certification

