

INSTRUCTION MANUAL


I Installation Notice

1. Please lay water pipes in accordance with this manual.
2. Floor drain should be installed on the site.
3. The outlet elbow should be installed only after the completion of house interior decoration in case paint or other chemicals erode the mixer surface.
4. Clean pipes to get rid of mud, sand or other debris blocked in pipes before installation. The pipeline at the front end of the intake must be equipped with filters.
5. Check whether the threads can be matched. Otherwise, install forcefully will damage the components.
6. After installation, check all the joints to make sure they are firmly connected. Then keep water flow. Turn on and off repeatedly to ensure no leaking problem. After that, the product is ready for use.
7. Hand the manual to users.

II Operation Notice

1. The product is used under water temperature 4~90°C and water pressure 0.05~1.0 MPa. Main valve should be equipped with a filter.
2. Do not hang heavy things on the product.
3. Clean the surface of the product regularly to keep it bright. Note: Please do not use inappropriate tools such as sharp brushes, rough sponges, scouring pads or corrosive detergent. And it is not recommended to use the detergent sold in the market, because its formula changes frequently. Please clean the product with wet cloth and soapy water after some time of usage. Then rinse the soap off with clean water and dry with a soft cotton cloth.
4. Adjust the temperature before use in case of scald.
5. Do not disassemble the product without help from the professional

III. Installation Diagram


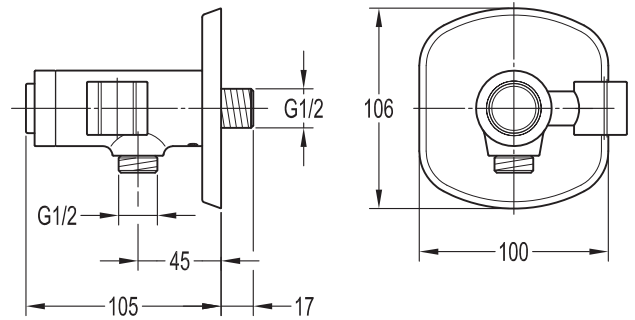


IV. Installation Steps(Fig.1-3) : *

The installation diagram is only for reference.
The product is subject to the real object.

1

Prepare and check the following tools.



INSTRUCTION MANUAL


I Installation Notice

1. Please lay water pipes in accordance with this manual.
2. Floor drain should be installed on the site.
3. The outlet elbow should be installed only after the completion of house interior decoration in case paint or other chemicals erode the mixer surface.
4. Clean pipes to get rid of mud, sand or other debris blocked in pipes before installation. The pipeline at the front end of the intake must be equipped with filters.
5. Check whether the threads can be matched. Otherwise, install forcefully will damage the components.
6. After installation, check all the joints to make sure they are firmly connected. Then keep water flow. Turn on and off repeatedly to ensure no leaking problem. After that, the product is ready for use.
7. Hand the manual to users.

II Operation Notice

1. The product is used under water temperature 4~90°C and water pressure 0.05~1.0 MPa. Main valve should be equipped with a filter.
2. Do not hang heavy things on the product.
3. Clean the surface of the product regularly to keep it bright. Note: Please do not use inappropriate tools such as sharp brushes, rough sponges, scouring pads or corrosive detergent. And it is not recommended to use the detergent sold in the market, because its formula changes frequently. Please clean the product with wet cloth and soapy water after some time of usage. Then rinse the soap off with clean water and dry with a soft cotton cloth.
4. Adjust the temperature before use in case of scald.
5. Do not disassemble the product without help from the professionals.

III. Installation Diagram


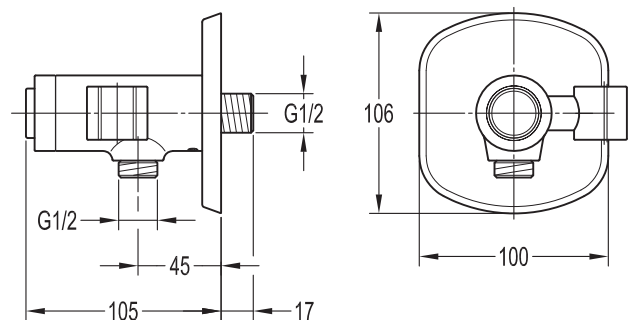


IV. Installation Steps(Fig.1-3) : *


The installation diagram is only for reference.
The product is subject to the real object.

1


Prepare and check the following tools.




2



Put the cover plate on the adapter, wrap the thread with teflon tape and screw it into the inlet pipe.




3



Install the valve body to the adapter, then tighten M5 screws.


V. Instructions for Use (Fig:4-5):

4




Press the button to open the valve and press again to shut it off.

The button is short when valve is closed




The button is high when valve is open




5


The shower holder is rotatable.

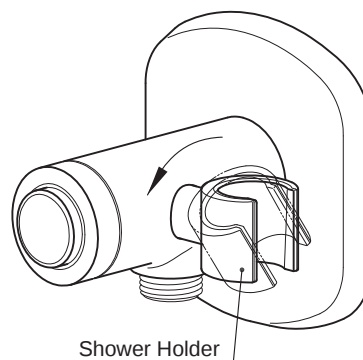


2



Put the cover plate on the adapter, wrap the thread with teflon tape and screw it into the inlet pipe.




3



Install the valve body to the adapter, then tighten M5 screws.


V. Instructions for Use (Fig:4-5):

4




Press the button to open the valve and press again to shut it off.

The button is short when valve is closed



The button is high when valve is open



5

The shower holder is rotatable.

